MERCADO

SALT LAKE.

Color Body Glazed Porcelain Tile
Glazed Ceramic Tile

Inspired by the fascinating salt lakes, this collection stands out for the contrast of tones and fluidity of the oxidized color details, giving the product a striking personality. Salt Lake's extraordinary color composition changes with the seasons caused by the presence of natural elements, creating a variety of light tones in early spring, which darken in the autumn-winter and transform into a beautiful terracotta pattern in the summer.
The pieces stands out for their tonal richness and visual textures that create beautiful compositions.

Salt Lake

Color Body Glazed Porcelain Tile | Glazed Ceramic Tile

Spring | V3

12x24 NAT BOLD | #80091ET

Single Bullnose

3x12 NAT BN RECT #80114ET

Equinox | V3

12x24 NAT BOLD | #80092ET

Single Bullnose

3x12 NAT BN RECT #80116ET

Winter | V3

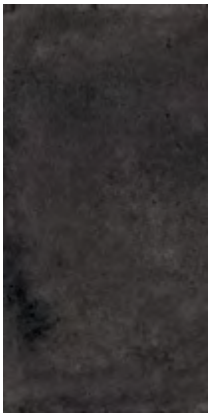

12x24 NAT BOLD | #80097ET

Single Bullnose

3x12 NAT BN RECT #80117ET

Autumn | V3

12x24 NAT BOLD | #80093ET

Single Bullnose

3x12 NAT BN RECT #80115ET

Spring | V4

8x8 MATTE BOLD
#202715ET

Equinox | V4

8x8 MATTE BOLD
#202718ET

Winter | V4

8x8 MATTE BOLD
#202722ET

Autumn | V4

8x8 MATTE BOLD
#202720ET

Summer | V4

8x8 MATTE BOLD
#202811ET

Mos Sq 2x2
Spring | V3

12x12 NAT TEL
#80099ET

Mos Sq 2x2
Equinox | V3

12x12 NAT TEL
#80100ET

Mos Sq 2x2
Winter | V3

12x12 NAT TEL
#80102ET

Mos Sq 2x2
Autumn | V3

12x12 NAT TEL
#80101ET

Spring
Summer

TECH DATA

Finish	Freeze Resistant	Shade Variation	Color Body	Water Absorption	Stain Resistant	DCOF AcuTest	Chemical Resistant	Breaking Strength	Abrasion Resistance
MATTE BOLD	Not Resistant	V4	N/A	≤0.5%	Class A	≥0.42	Class A	≥250lbf	III
NAT TEL	Resistant	V3	√	≤0.5%	Class A	≥0.42	Class A	≥250lbf	III
NAT BOLD	Resistant	V3	√	≤0.5%	Class A	≥0.42	Class A	≥275lbf	III

PACKING INFO

Product Size Inches	Actual Size	THICKNESS MM	LBS/ CARTON	PCS/ CARTON	SF/ CARTON	SF/ PALLET	LBS/ PALLET	CARTON/ PALLET
8x8	7.87X7.87	7	20.94	16	6.89	744.12	2,312.65	108
12x12	11.87X11.87	10	39.99	10	10	360	1,484.09	36
12x24	11.63X23.4	7.5	55.58	9	17.6	563.2	1,823.55	32

For reference only.

AREAS OF USAGE

Classification	Reference Category	Suitable
Interior, Dry	ID	√
Interior, Wet	IW	√
Interior, Wet Plus	IW+	√ 2x2
Exterior, Wet	EW	
Oils/Greases	O/G	

GROUT JOINT

The recommended grout joint:
3/16 BOLD

FORMATS



12x24

8X8

12x12

Equinox

MERCADO

#WHYTILE

TCNA