

BAKERSFIELD

Glazed Porcelain Floor
& Ceramic Wall Tile



BAKERSFIELD



Shown: 89233 18x18 Wicker, 89233 10x13 Wicker (ceramic), 89233/M12 Wicker mosaic



89204 10x13
Eggshell (ceramic)



89204 12x12
Eggshell



89204 18x18
Eggshell



89204 12x24
Eggshell



89204/M12
Eggshell mosaic



89233 10x13
Wicker (ceramic)



89233 12x12
Wicker



89233 18x18
Wicker



89233 12x24
Wicker



89233/M12
Wicker mosaic




89214 10x13
Pumice (ceramic)



89214 12x12
Pumice



89214 18x18
Pumice

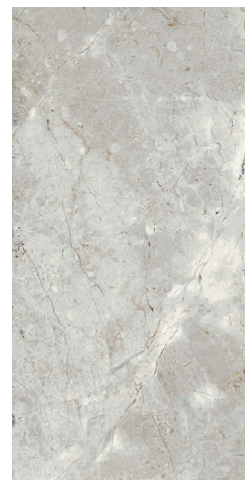

89214 12x24
Pumice



89214/M12
Pumice mosaic



Shown: 89204 18x18 Eggshell, 89204 10x13 Eggshell (ceramic)

BAKERSFIELD

Typical Uses

Bakersfield glazed porcelain floor and ceramic wall tile is appropriate for all residential and commercial wall, countertop and backsplash applications, all residential and most commercial floor applications.

Made in the USA: With the exception of select trim, decorative and ceramic pieces, this product line is Made in the USA of 40% pre-consumer recycled content, is GREENGUARD and Porcelain Tile certified, and meets the DCOF AcuTest requirements to be installed in wet areas.

Notice: Not all flooring products are suitable for wet areas, specialized applications or commercial use. Please refer to the American National Standard Specifications for Ceramic Tile (ANSI A137.1) for ceramic, stone and glass installation for specific usage and installation information.

This product will contribute to USGBC LEED points and the ANSI approved NAHB Green Building Points.

Properties (Floor)	ASTM	ANSI	Results ¹
DCOF AcuTest ²	A137.1	≥0.42	Pass
Glaze Hardness	Mohs Scale	n/a	7 Mohs
Break Strength	C-648	250 lbf.	Pass
Water Absorption	C-373	≤0.5%	≤0.5%

¹ These tests are performed by a 3rd party testing lab using industry standard equipment and techniques. Values are offered in good faith as being accurate and typical of normal production. Due to the natural variation of raw materials and manufacturing processes, the values of the purchased product for any particular installation may vary.

² ANSI A137.1 standard, ceramic tiles selected for level interior spaces expected to be walked upon when wet must have a minimum wet DCOF AcuTest value of 0.42.

Field Tile Nominal Size ¹	Metric (cm)	Pcs./Sq Ft ²	Thickness ³
12" x 12"	30 x 30	1	8mm
18" x 18"	45 x 45	.44	8.5mm
12" x 24"	30 x 60	.5	9mm
10" x 13" (ceramic)	25 x 33	1.11	6.5mm

¹ These values may vary from lot to lot.


² These values are based on actual sizes including the grout joint.

³ May not apply to textured surfaces or tiles with uneven back patterns.

Trim	Shape	SKU	Nominal Size	Metric (cm)
Bullnose		P43C9	3" x 12"	7.5 x 30
Bullnose		S43A9	3" x 10"	7.5 x 25
Bullnose		SN4339	3" x 3"	7.5 x 7.5

Color Variations

Color reproductions in this printed piece may vary from actual tile colors. Final selection should be made from actual tile samples.



V2 = Slight Variation

Clearly distinguishable differences in texture and/or pattern with similar colors.

Shown on cover: 89214 12x24 Pumice, 89214 10x13 Pumice (ceramic)

