

AINSLEE PARK HDP

в y floridatile



Shown: AIN40 12x24 Breccia Mist, AIN4W 12.1x24.4 Breccia Mist (ceramic), AIN40/M122 Breccia Mist mosaic

Classic designs paired elegantly with modern formats make Florida Tile's Ainslee Park^{HDP} the perfect option for today's easy eclectic spaces. Marble looks feature bold graphics that allow each color to be a standout in the crowded world of interior decor. Glossy ceramic wall and matte porcelain floor tile coordinate beautifully to allow for a continuous design theme throughout any space.

Four distinct colors: Breccia Mist is a cool gray with strong veining of dark smoke and wispy whites. Emperador Beige is a warm sandy neutral with a bright elaborate vein. Calacatta Gold is evocative of its namesake stone featuring a thick gray vein graphic with a subtle gold undertone. Zebrino Taupe is the stunning zenith of this collection with linear veins of cool gray and warm taupe.

Glossy Ceramic wall tiles in a 12.1x24.4 format and matte porcelain floor tiles are available in 3.75x12 (rectified), 12x12 and 12x24 formats. A diverse selection of mosaics and accessory pieces round out this flexible collection:

- 36-dot mesh-mounted mosaic in Breccia Mist, Calacatta Gold, and Emperador Beige
- 1x6 mesh-mounted, stack mosaic in Zebrino Taupe
- Hexagon mesh-mounted mosaic features a mix of Breccia Mist and Calacatta Gold
- 2x12 wall listellos in metallic tones of Brass or Steel
- Matte, porcelain 3x12 floor bullnose in all colors
- Glossy, ceramic 3x12 wall bullnose and 3x3 wall bullnose corner in all colors

Ainslee Park^{HDP} glazed porcelain floor tile is appropriate for all residential and commercial wall, countertop and backsplash applications, all residential and most commercial floor applications. Glazed ceramic wall tile is appropriate for all residential and commercial wall, countertop and backsplash applications. With the exception of select trim, decorative and ceramic field tile, this line is made in the USA of 40% pre-consumer recycled content, is GREENGUARD® and Porcelain Tile certified.

SHADE VARIATION



Calacatta Gold




Emperador Beige



Zebrino Taupe



Breccia Mist

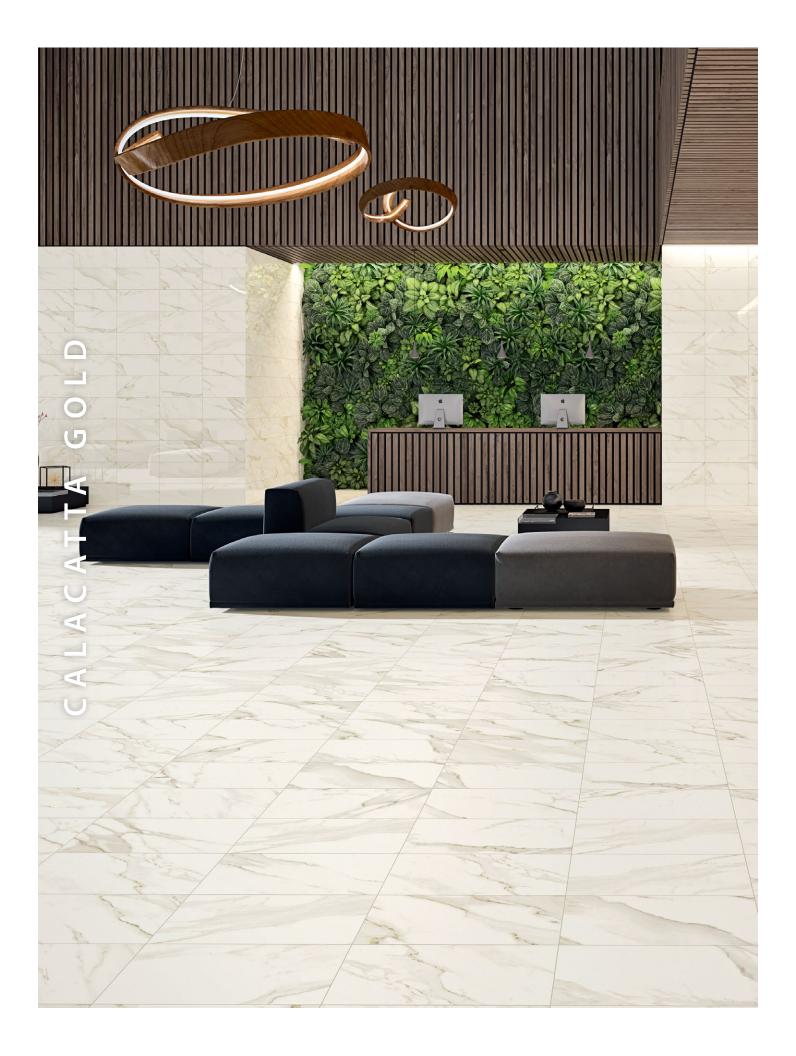



Shown: AIN10 12x24 Calacatta Gold, AIN1W 12.1x24.4 Calacatta Gold (ceramic)





AIN55/M4x4HEX Hexagon Mix mosaic



AIN10/M122 Calacatta Gold mosaic



AIN10 12x12 Calacatta Gold



AIN10 3.75x12 Calacatta Gold (rectified)



AIN1W 12.1x24.4 Calacatta Gold (ceramic)



AIN10 12x24 Calacatta Gold





Shown: AIN40 12x24 Breccia Mist, AIN4W 12.1x24.4 Breccia Mist (ceramic), AIN40/M122 Breccia Mist mosaic, AIN01/L2x12 Steel listello









AIN40/M122 Breccia Mist mosaic



AIN40 12x12 Breccia Mist



AIN40 3.75x12 Breccia Mist (rectified)



AIN4W 12.1x24.4 Breccia Mist (ceramic)



AIN40 12x24 Breccia Mist





Shown: AIN30 12x24 Zebrino Taupe, AIN3W 12.1x24.4 Zebrino Taupe (ceramic), AIN30/M1x6STK Zebrino Taupe Stack mosaic



AlN00/L2x12 Brass listello (wall only)



AIN3W 12.1x24.4 Zebrino Taupe (ceramic)



AIN30/M1x6STK Zebrino Taupe Stack mosaic



AIN30 12x12 Zebrino Taupe



AIN30 3.75x12 Zebrino Taupe (rectified)



AIN30 12x24 Zebrino Taupe





Shown: AIN20 12x24 Emperador Beige





AIN2W 12.1x24.4 Emperador Beige (ceramic)



AIN20/M122 Emperador Beige mosaic



AIN20 12x12 Emperador Beige



AIN20 3.75x12 Emperador Beige (rectified)



AIN20 12x24 Emperador Beige



Shown: AIN10 12x24 Calacatta Gold, AIN1W 12.1x24.4 Calacatta Gold (ceramic)

AINSLEE PARK HDP

в y floridatile

Typical Uses

Ainslee Park^{HDP} glazed porcelain floor tile is appropriate for all residential and commercial wall, countertop and backsplash applications, all residential and most commercial floor applications. Ainslee Park glazed ceramic wall tile is appropriate for all residential and commercial wall, countertop and backsplash applications.

Made in the USA: With the exception of select trim, decorative and ceramic field tile, this line is Made in the USA of 40% pre-consumer recycled content, is $\mathsf{GREENGUARD}^{\otimes}$ and $\mathsf{Porcelain}$ Tile Certified and meets the DCOF AcuTest requirements to be installed in wet areas.

Notice: Not all flooring products are suitable for wet areas, specialized applications or commercial use. Please refer to the American National Standard Specifications for Ceramic Tile (ANSI A137.1) for ceramic, stone and glass installation for specific usage and installation information.

This Florida Tile product will contribute to USGBC LEED points and the ANSI approved NAHB Green Building Points.

Properties (Floor)	ASTM	ANSI	Results ¹
DCOF AcuTest ²	A137.1	≥0.42	Pass
Visible Abrasion Resistance	C-1027	As Reported ³	IV-Emperador Beige V-Breccia Mist, Calacatta Gold & Zebrino Taupe
Mohs Surface Hardness	CTI 81-7	Not Required	7 Mohs
Break Strength	C-648	250 lbf	510 lbf avg.
Water Absorption	C-373	<0.5%	Conforms

¹ These tests are performed by a 3rd party testing lab using industry standard equipment and techniques. Values are offered in good faith as being accurate and typical of normal production. Due to the natural variation of raw materials and manufacturing processes, the values of the purchased product for any particular installation may vary.

Field Tile Nominal Size ¹	Metric (cm)	Pcs./Sq Ft ²	Thickness ³
12.1" x 24.4" (ceramic)	31 x 62	.5	8.5mm
3.75" x 12" (rectified)	9.5 x 30	3.25	8mm
12" x 12"	30 x 30	1	8mm
12" x 24"	30 x 60	.5	9mm

These values may vary from lot to lot.

²These values are based on actual sizes including the grout joint. ³ May not apply to textured surfaces or tiles with uneven back patterns.

Trim	Shape	SKU	Nominal Size	Metric (cm)
Bullnose		P43C9	3" x 12"	7.5 x 30
Bullnose (ceramic)		S43C9	3" x 12"	7.5 x 30
Corner (ceramic)		SN4339	3" x 3"	7.5 x 7.5

Color Variations

Color reproductions in this printed piece may vary from actual tile colors. Final selection should be made from actual tile samples.



Slight Variation

Clearly distinguishable differences in texture, and/or pattern with similar colors.















² ANSI A137.1 standard, ceramic tiles selected for level interior spaces expected to be walked upon when wet must have a minimum wet DCOF AcuTest value of 0.42.

³ Class 0 Not recommended for floors, Class I Light Residential, Class II Residential, Class III Heavy Residential or Light Commercial, Class IV Commercial, Class V Heavy Commercial.