


11/1














FLOOR TILE SIZES AND COLORS

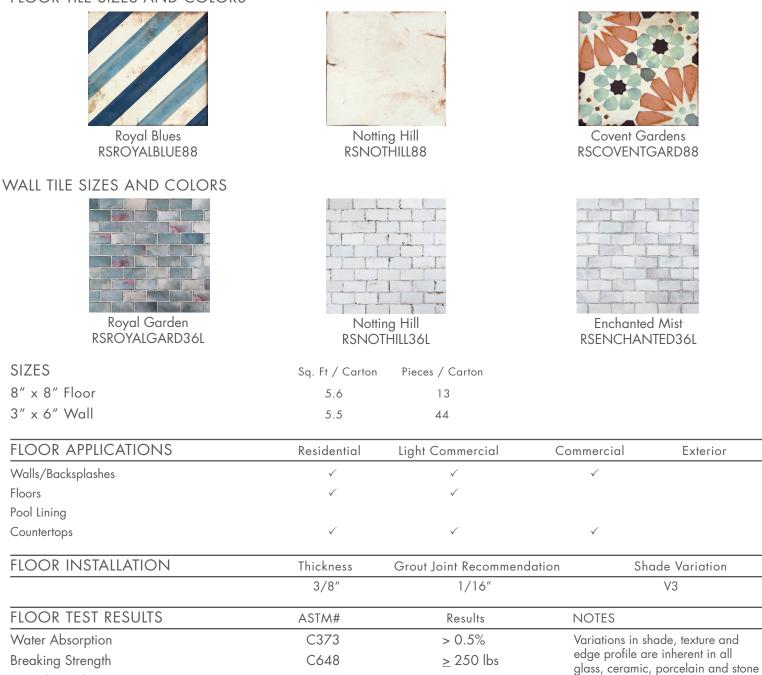

MOHS

C650

A137.1

Residential

 \checkmark

Thickness

5/16″

5.0

Resistant

≥ 0.42

Grout Joint Recommenation 1/16"

Light Commercial

NOTES

Scratch Hardness

Chemical Resistance

Walls/Backsplashes

WALL APPLICATIONS

WALL INSTALLATION

DCOF

Variations in shade, texture and edge profile are inherent in all glass, ceramic, porcelain and stone tiles. Always inspect product prior to installation.



Shade Variation

V3

tiles. Always inspect product prior

to installation.

Commercial

 \checkmark

Exterior