



Pro Nude Unpolished 24"x24" R

CONCRETES



# Pro

Basic and essential. This sums up the Pro series, which comes in an array of neutral colors that are practical to use and easy to maintain in any type of space.



Pro Nude Unpolished 24"x24" R

Glazed Porcelain

  24"x24" R - 35"x35" R

# Pro

Glazed Porcelain

CONCRETES

Floor Tiles



**35"x35" R** 90x90 cm  
**24"x24" R** 60x60 cm



## Ivory



**24"x24" R UP**  
I64270020A



**35"x36" R PO**  
I96080016A



**35"x36" R UP**  
I64240064A



## Cement



**24"x24" R UP**  
I64270022A



**35"x36" R PO**  
I96080012A



**35"x36" R UP**  
I64240060A



## Nude



**24"x24" R UP**  
I64270016A



**35"x36" R PO**  
I96080018A



**35"x36" R UP**  
I64240066A



## Concrete




**24"x24" R UP**  
I64270024A



**35"x36" R PO**  
I96080014A



**35"x36" R UP**  
I64240062A

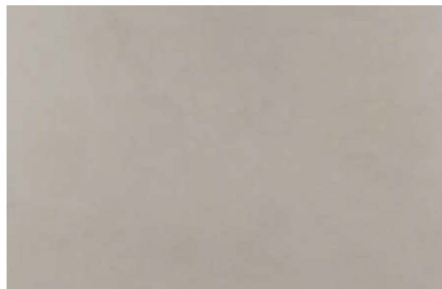

## Sand



**24"x24" R UP**  
I64270018A



**35"x36" R PO**  
I96080020A



**35"x36" R UP**  
I64240068A

# Technical Specifications

Characteristics	Standard	Declared ASTM
Water Absorption	C373	$\leq 0.5\%$
Break Strength	C648	Min. 350
Scratch Hardness	MOH's Scale	4
Chemical Resistance	C650	Unaffected
Frost Resistance	C1026	Resistant
Group	C1027	3
Minimum Bond Strength (PSI)	C482	165
Dynamic Coefficient of Friction (DCOF)	A137.1	$\geq 0.42$
Shade and Texture Rating	CTDA "V"	V3
Facial Dimensions	C499	Pass
Range of Thickness	C499	Pass
Warpage	C485	Pass
Wedging	C502	Pass

## Packaging Info

Size	SF. Per Carton	Pieces Per Carton
24"x24"	23.25	6
35"x35"	17.22	2