

Inspired by the movement of water, our Flow collection transforms any room with its fresh color palette and unique texture, creating a space that stimulates the senses. Far from the traditional handmade tiles, this collection creates the ideal oasis for anyone that loves feeling youthful and enjoys modern adaptations of classics.



Flow Dark Gray 3"x12" Picket


Ceramic Wall & Gres Stonewear

3"x12" - 3"x12" Picket - 4"x16"

◇ 8"x9"



Ceramic Wall Tiles Wall Tiles

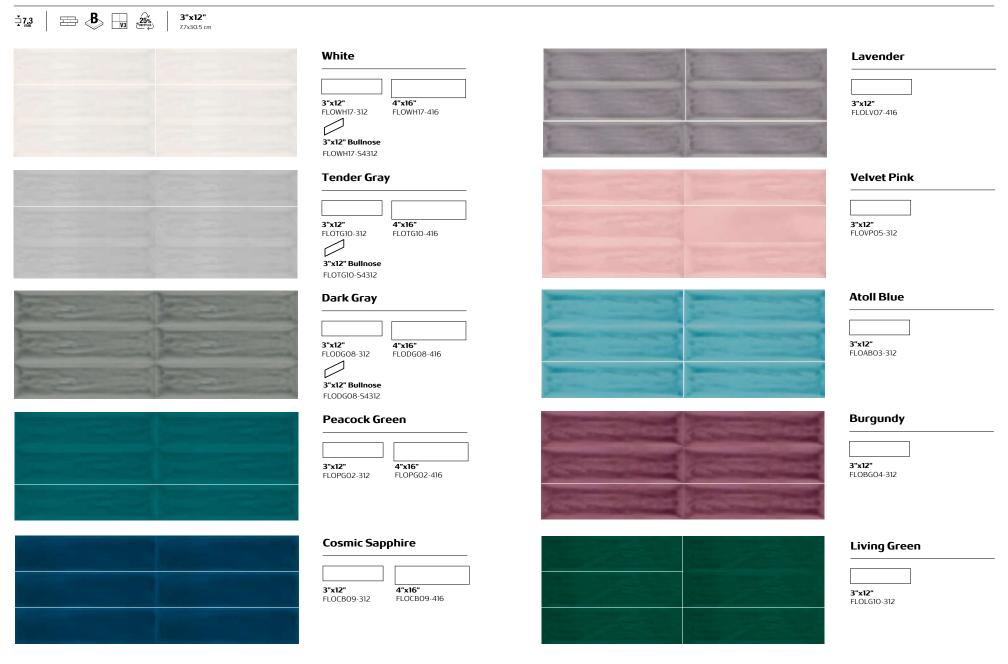



Ceramic Wall Tiles Wall Tiles

7.3 |







3"x12" 7.7x30.5 cm



White

3"x12" Picket FLOWH17-312P



Tender Gray

3"x12" Picket FLOTG10-312P




Dark Gray

3"x12" Picket FLODG08-312P



Peacock Green

3"x12" Picket FLOPG02-312P



Cosmic Sapphire

3"x12" Picket FLOCB09-312P



Installation Recommendation:

The recommended overlap for the 3"X12", 4"X16" and 6"X18" Ceramic Wall Tile formats is 33%, which is most effective to avoid lippage



Gres Stonewear Floor Tiles














White



8"X9" Hexagon FLOWH17-89H



Tender Gray




8"X9" Hexagon FLOTG10-89H



Dark Gray




8"X9" Hexagon FLODGO8-89H



Peacock Green



8"X9" Hexagon FLOPGO2-89H



Cosmic Sapphire



8"X9" Hexagon FLOCB09-89H



Technical Specifications - 3"x12", 3"x12" Picket & 4"x16"

Characteristics	Standard	Declared ASTM
Water Absorption	C373	>10%
Break Strength	C648	Meets or exceeds
Scratch Hardness	MOH's Scale	N/A
Chemical Resistance	C650	Unaffected
Shade and Texture Rating	CTDA "V"	V3
Warpage	C485	Pass
Wedging	C502	Pass

Technical Specifications - Hexagon

•	3	
CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	C373	<3%
Break Strength	C648	Min. 250
Scratch Hardness	MOH's Scale	5
Chemical Resistance	C650	Unaffected
Frost Resistance	C1026	Resistant
Group	See FAQ's	3
Deep Abrasion - Unglazed Tiles	C1243	-
PEI Glazed Tiles	C1027	4
Minimum Bond Strength (PSI)	C482	165
Dynamic Coefficient of Friction (DCOF)	A137.1	>=0.42
Shade and Texture Rating	CTDA "V"	V2
Facial Dimensions	C499	Pass
Range of Thickness	C499	Pass
Warpage	C485	Pass
Wedging	C502	Pass

Packaging Info

Size	SF per carton	PC per carton
3"x12"	12.64	50
Picket	11.79	50
Bullnose	12.59	50
Hexagon	10.36	28
4"x16"	15.33	32