



**Roca**

# Lithology Edition

# Astoria

An abstract proposal away from classic white marbles. Ideal for minimalist spaces, reinvented from an Antique stone to a contemporary look by using neutral soft tones.



Astoria Gray 12"x24"

**Glazed Porcelain**

◇ ▣ 24"x48" R - 12"x24"



# Astoria

Glazed Porcelain


**24"x48" R** 60x120 cm | **12"x24"** 30x60 cm



## Gray


**24"x48" R**  
 UASTOFD1LBI  

**12"x24"**  
 UASTOFD16BI

## Other Faces



## Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	C373	<=0.5%
Break Strength	C648	Min. 275
Chemical Resistance	C650	Class A (Resist) <sup>1</sup>
Stain Resistance	C1378	Class A
Frost Resistance	C1026	Resistant
Thermal Shock Resistance	C484	Resistant
Crazing Resistance	C424	Resistant
Group	See FAQ's	4
PEI- Glazed Tiles	C1027	PEI (IV)
Dynamic Coefficient of Friction (DCOF)	A326.3	>=0.42
Shade and Texture Rating	CTDA "V"	V3
Facial Dimensions	C499	Pass
Range of Thickness	C499	Pass
Warpage	C485	Pass
Wedging	C502	Pass

## Packaging Information

Size	SF per carton	PC per carton	Bx per pallet
12"x24"	17.44	9	32
24"X48" R	15.18	2	30

# Basalt

The beautiful interpretation of volcanic rock presents an interesting proposal in the matte finish of a sober, neutral, and minimalist stone.



Basalt 12"x24"

Glazed Porcelain

◇ ≡ 12"x24"


# Basalt

Glazed Porcelain

8.5 mm |  | **12"x24"**  
30x60 cm




## White



12"x24"  
UBASALT16BU

## Other Faces

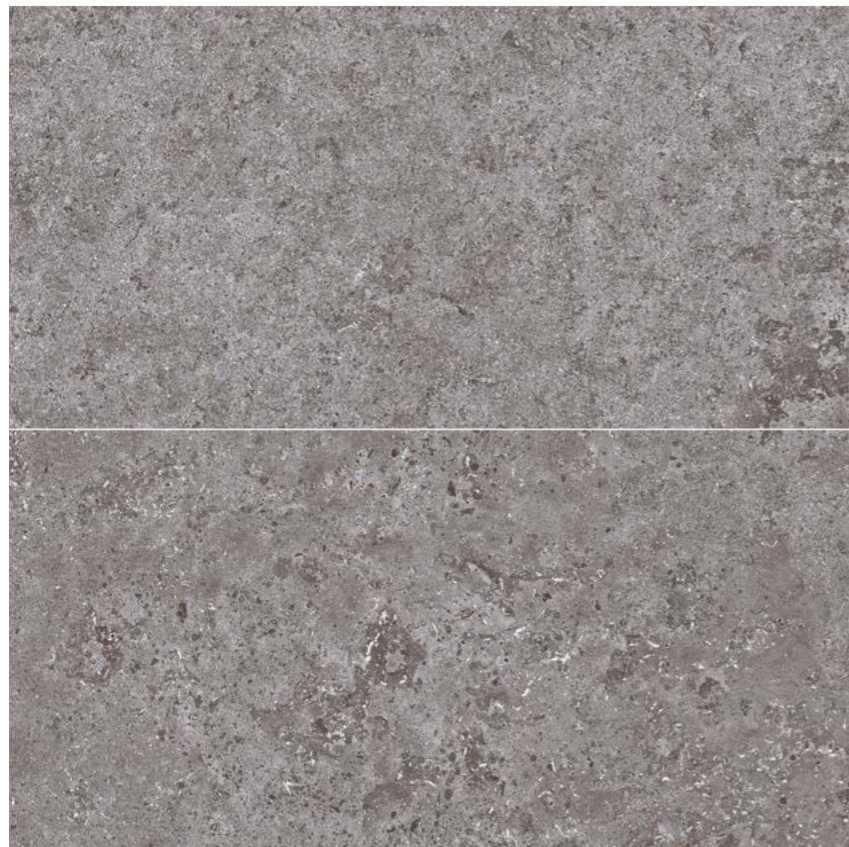

## Gray




12"x24"  
UBASALT16BI




# Basalt

Glazed Porcelain


**12"x24"**  
 30x60 cm

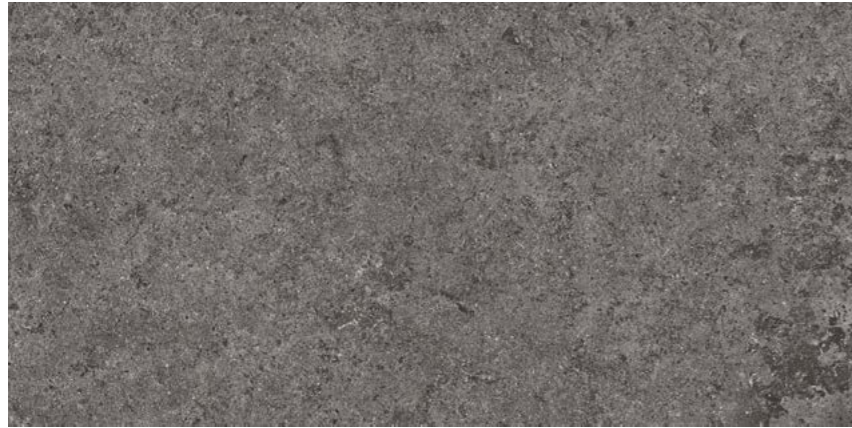

## Graphite

  
**12"x24"**  
 UBASALT16BW

## Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	C373	<=0.5%
Break Strength	C648	Min. 275
Chemical Resistance	C650	Class A (Resist) <sup>1</sup>
Stain Resistance	C1378	Class A
Frost Resistance	C1026	Resistant
Thermal Shock Resistance	C484	Resistant
Crazing Resistance	C424	Resistant
Group	See FAQ's	4
PEI- Glazed Tiles	C1027	PEI (IV)
Dynamic Coefficient of Friction (DCOF)	A326.3	>=0.42
Shade and Texture Rating	CTDA "V"	V3
Facial Dimensions	C499	Pass
Range of Thickness	C499	Pass
Warpage	C485	Pass
Wedging	C502	Pass

## Other Faces



## Packaging Info

Size	SF per carton	PC per carton	Bx per pallet
12"x24"	17.44	9	32

# Empire

The continuous search for natural matter and color palettes results in the classic Travertino crosscut look. A concept inspired by the rawness of the marble, preserving the original tone variation and direction of the veining.



Empire Beige 12"x24"

Glazed Porcelain

◇ ≡ 12"x24"


# Empire

Glazed Porcelain


**12"x24"**  
 30x60 cm



## Beige

  
**12"x24"**  
 UEMPIRP16BE

## Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	C373	<=0.5%
Break Strength	C648	Min. 275
Chemical Resistance	C650	Class A (Resist) <sup>1</sup>
Stain Resistance	C1378	Class A
Frost Resistance	C1026	Resistant
Thermal Shock Resistance	C484	Resistant
Crazing Resistance	C424	Resistant
Group	See FAQ's	4
PEI- Glazed Tiles	C1027	PEI (IV)
Dynamic Coefficient of Friction (DCOF)	A326.3	>=0.42
Shade and Texture Rating	CTDA "V"	V3
Facial Dimensions	C499	Pass
Range of Thickness	C499	Pass
Warpage	C485	Pass
Wedging	C502	Pass

## Other Faces



## Packaging Info

Size	SF per carton	PC per carton	Bx per pallet
12"x24"	17.44	9	32





# Ibiza

The essence of Invisible Grey, the new IT Stone, is a White marble with strong veins that achieve a beautiful composition of contrasts. Along with the carving effect, a low relief that matches perfectly with each vein by digital decoration, this material accomplishes an extremely natural look.

## Glazed Porcelain


◇ 24"x48" R - 12"x24"

Ibiza White 12"x24"



# Ibiza

Glazed Porcelain



**24"x48" R** 12"x24"  
 60x120 cm 30x60 cm

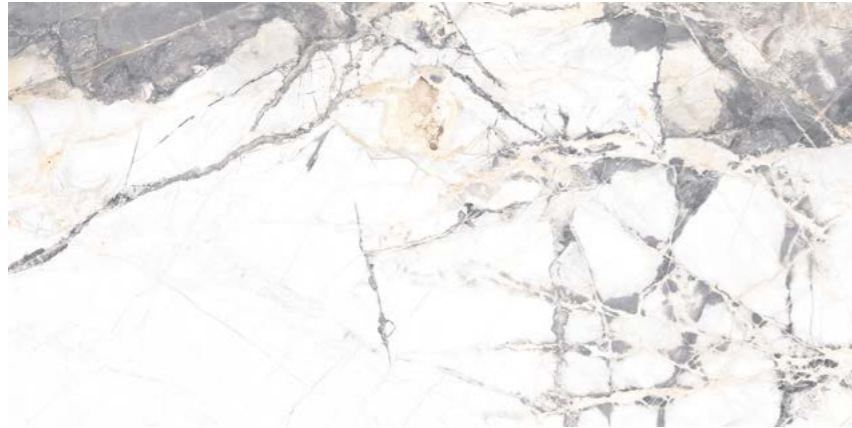

## White

-  **24"x48" R**  
UIBIZAF1LBV
-  **12"x24"**  
UIBIZAF16BV

## Other Faces

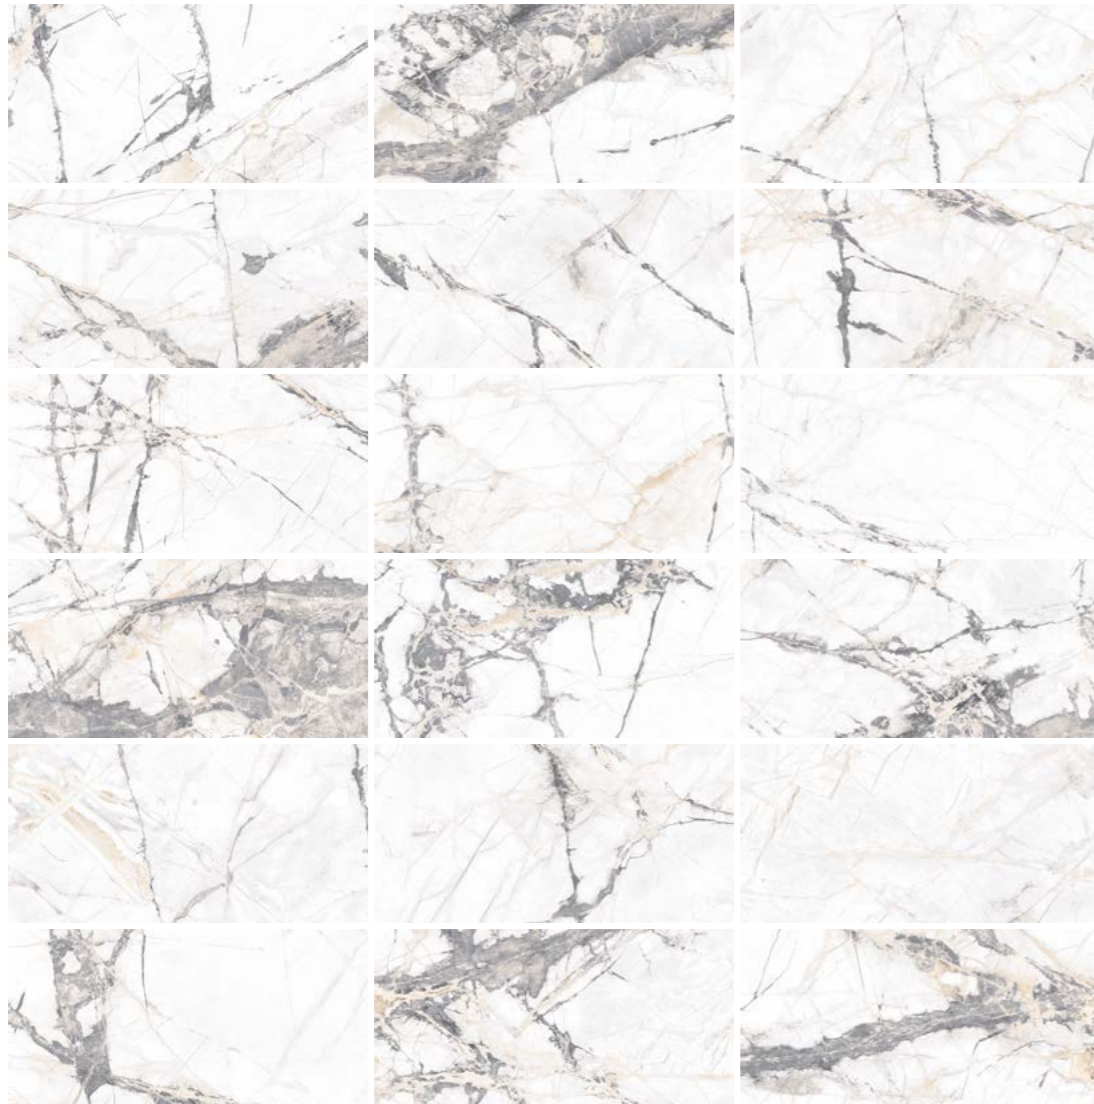

## Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	C373	<=0.5%
Break Strength	C648	Min. 275
Chemical Resistance	C650	Class A (Resist) <sup>1</sup>
Stain Resistance	C1378	Class A
Frost Resistance	C1026	Resistant
Thermal Shock Resistance	C484	Resistant
Crazing Resistance	C424	Resistant
Group	See FAQ's	4
PEI- Glazed Tiles	C1027	PEI (IV)
Dynamic Coefficient of Friction (DCOF)	A326.3	>=0.42
Shade and Texture Rating	CTDA "V"	V3
Facial Dimensions	C499	Pass
Range of Thickness	C499	Pass
Warpage	C485	Pass
Wedging	C502	Pass

## Packaging Information

Size	SF per carton	PC per carton	Bx per pallet
12"x24"	17.44	9	32
24"X48" R	15.18	2	30

# Moscato

Inspired in the all-time favorite Crema Marfil, updated into a seamless pattern with gold and sand undertones. Emphasized by the carving in the veining, to bring more authenticity to the marble.



Moscato Sand 12"x24"

Glazed Porcelain

◇ ≡ 12"x24"

# Moscato

Glazed Porcelain

8.5 mm |  | **12"x24"**  
30x60 cm



## Sand



12"x24"  
UMOSCAT16BU



## Taupe



12"x24"  
UMOSCAT16BG

## Other Faces



# Moscato

Glazed Porcelain

## Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	C373	<=0.5%
Break Strength	C648	Min. 275
Chemical Resistance	C650	Class A (Resist) <sup>1</sup>
Stain Resistance	C1378	Class A
Frost Resistance	C1026	Resistant
Thermal Shock Resistance	C484	Resistant
Crazing Resistance	C424	Resistant
Group	See FAQ's	4
PEI- Glazed Tiles	C1027	PEI (IV)
Dynamic Coefficient of Friction (DCOF)	A326.3	>=0.42
Shade and Texture Rating	CTDA "V"	V3
Facial Dimensions	C499	Pass
Range of Thickness	C499	Pass
Warpage	C485	Pass
Wedging	C502	Pass

## Packaging Info

Size	SF per carton	PC per carton	Bx per palette
12"x24"	17.44	9	32

# Polaris

Inspiration is brought from the Italian north region, where Calacata Gold is originated from. A natural marble whose elegance is emphasized by its particular veining and the subtle combination of light grey and golden tones.



Polaris White 12"x24"

Glazed Porcelain

◇ ≡ 24"x48" R - 12"x24"

# Polaris

Glazed Porcelain

8.5-10.8 mm | | **24"x48" R** 12"x24"  
60x120 cm 30x60 cm



## White



**24"x48" R**  
UPOLARI1LBV



**12"x24"**  
UPOLARI16BV

## Other Faces



## Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	C373	<=0.5%
Break Strength	C648	Min. 275
Chemical Resistance	C650	Class A (Resist) <sup>1</sup>
Stain Resistance	C1378	Class A
Frost Resistance	C1026	Resistant
Thermal Shock Resistance	C484	Resistant
Crazing Resistance	C424	Resistant
Group	See FAQ's	4
PEI- Glazed Tiles	C1027	PEI (IV)
Dynamic Coefficient of Friction (DCOF)	A326.3	>=0.42
Shade and Texture Rating	CTDA "V"	V3
Facial Dimensions	C499	Pass
Range of Thickness	C499	Pass
Warpage	C485	Pass
Wedging	C502	Pass

## Packaging Information

Size	SF per carton	PC per carton	Bx per pallet
12"x24"	17.44	9	32
24"X48" R	15.18	2	30

# Sandstone

An original blend between two stones brings to life this beautiful material, whose charm is found in the richness in textures resulting from the mix of thin veining and soft degraded.



Sandstone White 12"x24"

Glazed Porcelain

◇ 12"x24"



# Sandstone

Glazed Porcelain

8.5 mm |  |  | **12"x24"**  
30x60 cm



## White



**12"x24"**  
USANDST16BV



## Beige



**12"x24"**  
USANDST16BE

## Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	C373	<=0.5%
Break Strength	C648	Min. 275
Chemical Resistance	C650	Class A (Resist) <sup>1</sup>
Stain Resistance	C1378	Class A
Frost Resistance	C1026	Resistant
Thermal Shock Resistance	C484	Resistant
Crazing Resistance	C424	Resistant
Group	See FAQ's	4
PEI- Glazed Tiles	C1027	PEI (IV)
Dynamic Coefficient of Friction (DCOF)	A326.3	>=0.42
Shade and Texture Rating	CTDA "V"	V3
Facial Dimensions	C499	Pass
Range of Thickness	C499	Pass
Warpage	C485	Pass
Wedging	C502	Pass

## Packaging Info

Size	SF per carton	PC per carton	Bx per pallet
12"x24"	17.44	9	32

## Other Faces





PORCELAIN

# Urban Antracita

Experience the ultimate expression of urban sophistication with the Urban Series. This concrete look tile, inspired by cityscape hues, marries functionality with a modern aesthetic.

**Glazed Porcelain**

◇ ≡ 24"x48" R - 12"x24"


# Urban Antracita

Glazed Porcelain

8.5-10.8 mm | | **24"x48" R** 60x120 cm | **12"x24"** 30x60 cm



## Urban Antracita



**24"x48" R**  
URBANFD1LBE




**12"x24" R**  
URBANFD16BE

## Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	C373	<=0.5%
Break Strength	C648	Min. 275
Chemical Resistance	C650	Class A (Resist) <sup>1</sup>
Stain Resistance	C1378	Class A
Frost Resistance	C1026	Resistant
Group	See FAQ's	4
PEI- Glazed Tiles	C1027	III
Dynamic Coefficient of Friction (DCOF)	A326.3	>=0.42
Shade and Texture Rating	CTDA "V"	V3
Facial Dimensions	C499	Pass
Range of Thickness	C499	Pass
Warpage	C485	Pass
Wedging	C502	Pass

## Other Faces

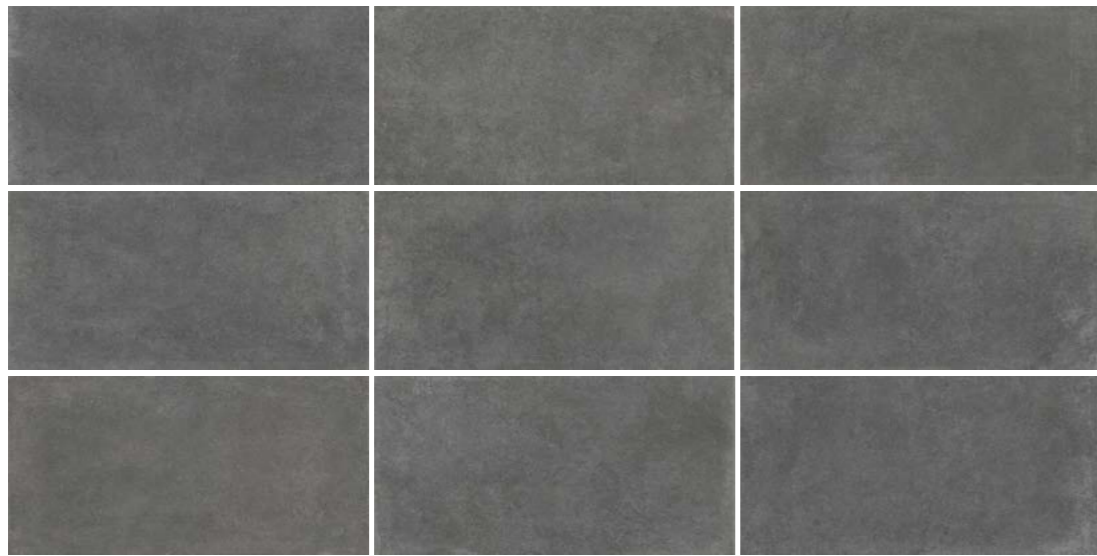

## Packaging Info

Size	SF per carton	PC per carton	Bx per pallet
12"x24"	17.44	9	32
24"X48" R	15.18	2	30

# Vesta

A new interpretation of the Travertino marble, calls for the spotlight. Accomplish a visual and tactile impact by its organic movement, and diverse multitone, combined with the low relief carving effect.



Vesta White 12"x24"

Glazed Porcelain

◇ ≡ 12"x24"

# Vesta

Glazed Porcelain

8.5 mm |  | **12"x24"**  
30x60 cm



## White



12"x24"  
UVESTAF16BV

## Other Faces



## Silver



12"x24"  
UVESTAF16BI



# Vesta

Glazed Porcelain


8.5 mm |  | **12"x24"**  
30x60 cm



## Sand



**12"x24"**  
UVESTAF16BE

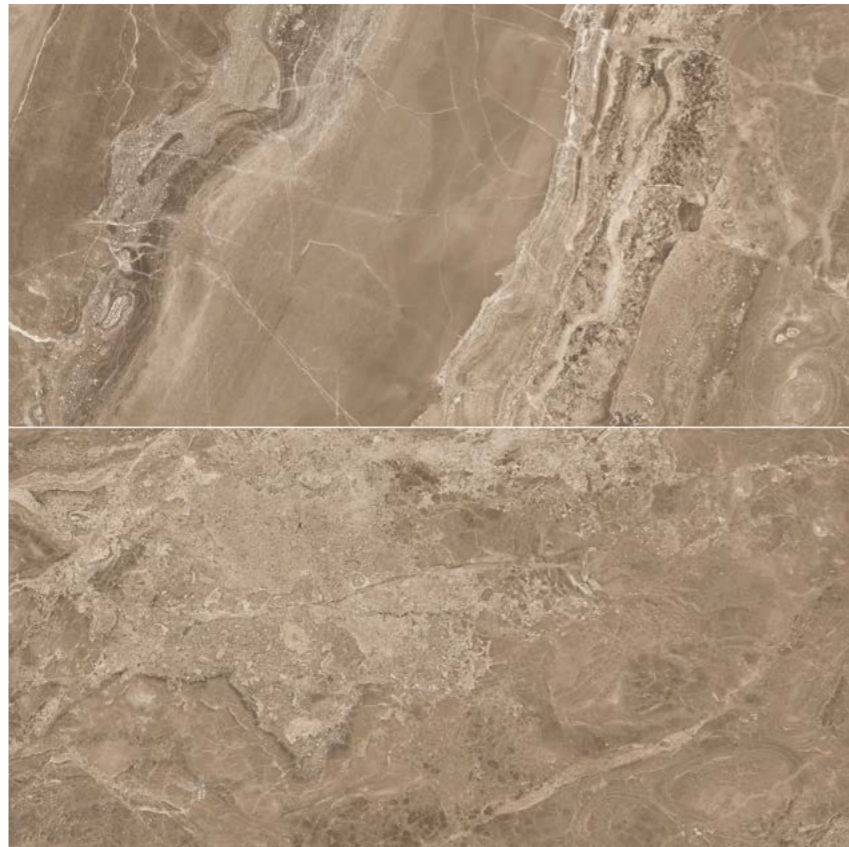

## Taupe



**12"x24"**  
UVESTAF16BG

## Other Faces



# Vesta

Glazed Porcelain

## Technical Specifications

<b>CHARACTERISTICS</b>	<b>STANDARD</b>	<b>DECLARED ASTM</b>
Water Absorption	C373	<=0.5%
Break Strength	C648	Min. 275
Chemical Resistance	C650	Class A (Resist) <sup>1</sup>
Stain Resistance	C1378	Class A
Frost Resistance	C1026	Resistant
Thermal Shock Resistance	C484	Resistant
Crazing Resistance	C424	Resistant
Group	See FAQ's	4
PEI- Glazed Tiles	C1027	PEI (IV)
Dynamic Coefficient of Friction (DCOF)	A326.3	>=0.42
Shade and Texture Rating	CTDA "V"	V3
Facial Dimensions	C499	Pass
Range of Thickness	C499	Pass
Warpage	C485	Pass
Wedging	C502	Pass

## Packaging Info

<b>Size</b>	<b>SF per carton</b>	<b>PC per carton</b>	<b>Bx per pallet</b>
12"x24"	17.44	9	32