


lungarno  
CERAMICS



CASABLANCA

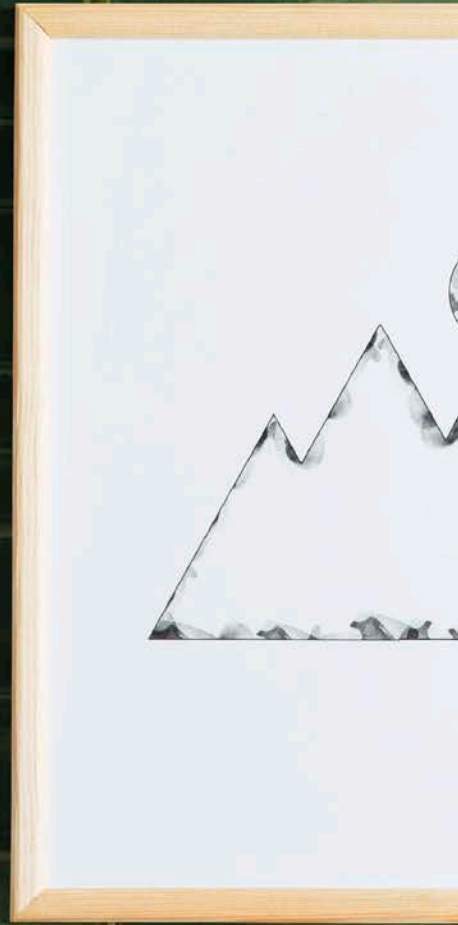

**CASABLANCA** blurs the lines between classic and contemporary, with vibrant colorways, go-to shapes and fun patterns. Bring dimension to walls with the structured wall tile, and round out the design with the petite hexagon floor tile.

**THE DETAILS:**

- 2" x 6" double-fired, dimensional wall tiles in three pre-mixed profiles
- 5.5" x 6" hexagonal floor tiles in solid colorways and complimenting decors

**STYLE IT:**

- Bar backsplashes with exposed shelving
- Mixed hexagon solid and decors in a powder or smaller bathroom floor
- Lobby or activity room accent walls in boutique hotels



Photo features Saffron 2" x 6"



Photo features Emerald Deco

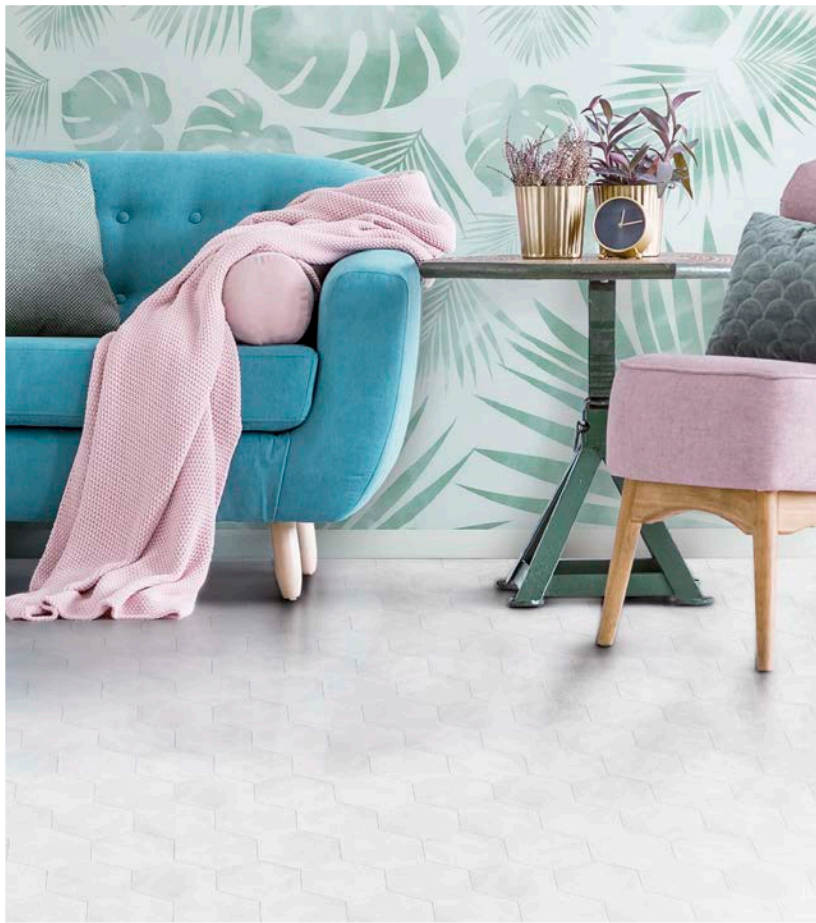



Photo features Cloud Solid

# CASABLANCA

Extruded Wall and Porcelain Floor Tile



## COLOR AVAILABILITY - WALL

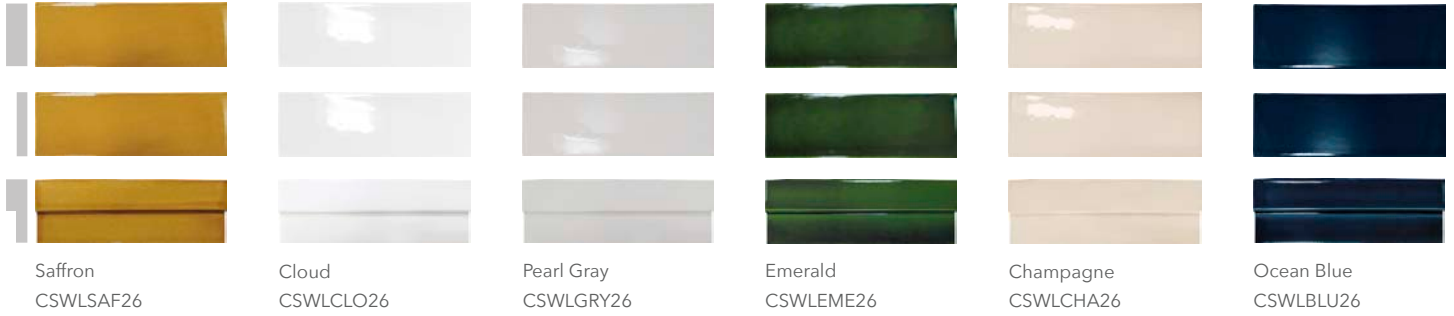

## COLOR AVAILABILITY - FLOOR



## SIZE AVAILABILITY

	NOMINAL SIZE	ACTUAL SIZE	THICKNESS	PC/CARTON	SQ.FT/CARTON
	2" x 6"*	1.97" x 5.91"	8mm - 12mm	66	5.35
	5.5" x 6"	5.51" x 6.34"	3/8"	30	5.37

\*All three profiles mixed randomly in each carton.



# CASABLANCA

Extruded Wall and Porcelain Floor Tile



TECHNICAL SPECIFICATIONS	WALL	FLOOR
<b>Material Type</b>	Ceramic (Extruded)	Porcelain
<b>Finish</b>	Glossy	Matte
<b>Edge</b>	Pressed	Pressed
<b>Color Variation</b>	V4	V3
<b>Printing</b>	N/A	Digital
<b>Installation</b>	Wall	Wall / Floor
<b>Usage</b>	Residential / Commercial	Residential / Commercial
<b>Grout Joint Recomm.</b>	1/16" or No Grout Joint	1/8"
<b>Thickness</b>	8mm - 12mm	3/8"
<b>Shower Pan</b>	No	Yes
<b>Pool Lining*</b>	No	Yes
<b>Fireplace Surround*</b>	Yes	Yes
<b>Frost Resistant</b>	No	Yes

\*Proper installation methods must be followed per project. Please reference TCNA for more information.

TEST RESULTS	WALL	FLOOR
<b>Water Absorption (C373)</b>	> 10%	≤ 0.5 %
<b>Breaking Strength (C648)</b>	N/A	≥ 250 LBS
<b>Surface Abrasion (MOHS)</b>	N/A	5.0
<b>Chem. Resistance (C650)</b>	N/A	Resistant
<b>D.C.O.F. (A137.1)</b>	N/A	> 0.42
<b>Scratch Hardness (P.E.I)</b>	N/A	4

Special Considerations for Wall:

- Variations in caliber, flatness, straightness, texture, design and shade are present in the artisanal manufacture process of this product.
- Special and vibrant glazes can produce an intentional crackle upon production, in transport or after installation.
- Dry-stacking is recommended for wall tile, although not required. When installing in a wet area, a waterproof member is required prior to installation, and grouting and sealing will be necessary.



Photo features Ocean Blue 2" x 6", Ocean Blue Deco and Cloud Solid