



Atlas Blanco PO 24"x24" R

Atlas II

Atlas, the dazzling range that is perfectly finished for spaces that seduce with their design, quality and beauty. This series provides a reflection of the taste for a contemporary aesthetic that fuses comfort, functionality and originality.



Atlas Negro PO 24"x24"R


Technical Porcelain

12"x24" R - 24"x24" R

Atlas II


Technical Porcelain

10 mm



24"x24" R
60x60 cm

12"x24" R
30x60 cm



Blanco



12"x24" R UP
TDCAT01-1224



12"x24" R PO
TDCAT01-1224PO



24"x24" R UP
TDCAT01-24



24"x24" R PO
TDCAT01-24PO



Negro



12"x24" R UP
TDCAT02-1224



12"x24" R PO
TDCAT02-1224PO



24"x24" R UP
TDCAT02-24



24"x24" R PO
TDCAT02-24PO



Perla




12"x24" R UP
TDCAT03-1224



Azul



12"x24" R UP
TDCAT04-1224

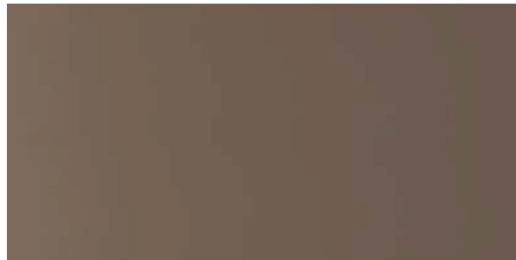

Marron



12"x24" R UP
TDCAT07-1224



Rojo



12"x24" R UP
TDCAT05-1224



Aloe



12"x24" R UP
TDCAT06-1224

Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM	
		POLISHED	UNPOLISHED
Water Absorption	C373	<=0.1%	<=0.1%
Break Strength	C648	Min. 630	Min. 630
Scratch Hardness	MOH's Scale	5	7
Chemical Resistance	C650	Unaffected	Unaffected
Frost Resistance	C1026	Resistant	Resistant
Group	See FAQ's	3	4
Deep Abrasion - Unglazed Tiles	C1243	Pass	Pass
PEI Glazed Tiles	C1027	-	-
Minimum Bond Strength (PSI)	C482	165	165
Dynamic Coefficient of Friction (DCOF)	A137.1	<=0.42	>=0.42
Shade and Texture Rating	CTDA "V"	V1	V1
Facial Dimensions	C499	Pass	Pass
Range of Thickness	C499	Pass	Pass
Warpage	C485	Pass	Pass
Wedging	C502	Pass	Pass

Packaging Info

Size	SF per carton	PC per carton
12"X24"	11.62	6
24"X24"	11.62	3